

Risk-Based Maintenance

How can you establish only carrying out the
correct maintenance: no more and no less?



SUMMARY

Do you want to get more out of maintenance, but wonder how to approach this? Many asset owners struggle with the challenges of how to optimise the performance of their assets and how to improve their maintenance strategy.

Applying a Risk-Based Maintenance strategy can be beneficial.

Contents

What is Risk-Based Maintenance?.....	4
Risk-Based Maintenance	4
Risk matrix.....	4
FMECA.....	5
Input and output.....	5
Input.....	5
Output	5
What is the advantage of applying RBM?	6
Customer feedback before implementation	6
Custom made for installed item.....	6
Overall Equipment Effectiveness.....	6
Complete maintenance strategy	7
Usage-Based Maintenance	7
Condition-Based Maintenance	7
Run-to-failure.....	7
Maintenance jobs insight.....	7
A known maintenance budget.....	8
Optional additions	8
Continuous improvement.....	9
Example case	10
Conclusion	14
How can we help you?	15

What is Risk-Based Maintenance?

Risk-Based Maintenance

Risk-Based Maintenance (RBM) is a method that primarily focuses on the philosophy of managing maintenance based on risks and their magnitude. Applying this method ensures a maintenance concept that is driven by technical availability as well as machine reliability based on CSi expertise and exponentially growing maintenance data.

Within RBM there are basically two different tools, which are used and combined to create the maintenance concept.

Risk matrix

A risk matrix is used while developing maintenance concepts. This is necessary to determine whether maintenance actions can make a value added (positive) contribution to the company's objectives, such as availability, optimising maintenance costs, maintaining the desired production quality, etc. The risk matrix is determined based on the business objectives of your organisation. An initial determination is made with regard to the acceptance limits of relevant risks. This is basically a classification of the criticality, based on the combination of the probability of a failure and the effect of such a failure. It is carried out for each system and piece of equipment, on the basis that no maintenance is performed at all.

In summary, the risk matrix with its acceptance limits provides the fundamental reasoning for executing maintenance. Eventually, unacceptable situations have to be mitigated or prevented, which is where FMECA (Failure Mode Effect & Criticality Analysis) comes into play.

Assessing Risks

		Probability of a failure		
		Unlikely	Possible	Likely
Effect of a failure	<i>Probability of a failure</i> X <i>Effect of a failure</i>			
	Low	1	2	3
	Medium	2	4	6
High	3	6	9	

FMECA

The maintenance concept has to be created once a validated risk matrix has been prepared. This will be realised by applying the Failure Mode Effect & Criticality Analysis (FMECA) method, in which 'Criticality' reflects the risk matrix.

The FMECA method is a systematic analysis that aims to identify all possible causes and consequences related to failures in a technical system before they actually occur. In particular, the effect of any such failure on fulfilling the function of a system is examined. The execution of an FMECA indicates the risk area in which a specific piece of equipment lies. Depending on the criticality of the equipment, the corresponding measures are then taken. These measures refer to defining the correct maintenance strategy and spare parts recommendations, as well as the actual maintenance task that has to be executed to mitigate or prevent the risk. This maps out the 'who, what, when and why'. In this way, the maintenance performed is always based on the strategically chosen objectives that are drawn up in the risk matrix.

Input and output

Input

We are able to import a company's risk matrix into an RBM program. In this way, the FMECA process and functionality is programmed into a database. These two tools ensure that the data in the program remains flexible and is custom-made for each customer.

Failure mode	
Failure mode	Does not transfer mechanical power
TAG	KH040001
Description	Roll. chain 5/8"-S
Function	Transmission of mechanical power
PRODUCTION RELIABILITY 10	Production stop between 4h and 8h
PRODUCTION RELIABILITY 50	Production stop between 0h and 4h
HEALTH & SAFETY	No effect on safety
ENVIRONMENT	No effect on environment
TECHNICAL COSTS (CONSEQU)	€ 0 to € 1.000
QUALITY	No Effect
Remarks	

Output

The program creates databases with all the information from any analysis performed. The program filters the data depending on the information that is required and presents it in the form of reports. The reports give an indication of the following factors:

- Object structure
- Criticality
- Failure causes & failure modes
- Unmitigated & mitigated risks
- Maintenance concept
- Preventive maintenance tasks
- Rounds
- Spare parts

The analysis itself can also be exported, in case it needs to be imported into a Computerised Maintenance Management System (CMMS).

Failure cause																						
Failure cause	Damaged chain																					
Failure mode	Does not transfer mechanical power																					
Condition	Wear																					
Failure type	Used based																					
MTBF (unmitigated)	3 Years																					
MTBF (mitigated)	10 Years																					
Remarks	MTBF based on worst case scenario. Check if it corresponds with position.																					
Hidden failure	<input type="checkbox"/>																					
	<table border="1"><thead><tr><th></th><th>Unmitigated</th><th>Mitigated</th></tr></thead><tbody><tr><td>PRODUCTION RELIABILITY 10</td><td>B-5</td><td>B-6</td></tr><tr><td>PRODUCTION RELIABILITY 50</td><td>A-5</td><td>A-6</td></tr><tr><td>HEALTH & SAFETY</td><td>A-5</td><td>A-6</td></tr><tr><td>ENVIRONMENT</td><td>A-5</td><td>A-6</td></tr><tr><td>TECHNICAL COSTS (CONSEQU)</td><td>B-5</td><td>B-6</td></tr><tr><td>QUALITY</td><td>A-5</td><td>A-6</td></tr></tbody></table>		Unmitigated	Mitigated	PRODUCTION RELIABILITY 10	B-5	B-6	PRODUCTION RELIABILITY 50	A-5	A-6	HEALTH & SAFETY	A-5	A-6	ENVIRONMENT	A-5	A-6	TECHNICAL COSTS (CONSEQU)	B-5	B-6	QUALITY	A-5	A-6
	Unmitigated	Mitigated																				
PRODUCTION RELIABILITY 10	B-5	B-6																				
PRODUCTION RELIABILITY 50	A-5	A-6																				
HEALTH & SAFETY	A-5	A-6																				
ENVIRONMENT	A-5	A-6																				
TECHNICAL COSTS (CONSEQU)	B-5	B-6																				
QUALITY	A-5	A-6																				
Risk Level	=> Overall risk level => Overall risk level																					

What is the advantage of applying RBM?

Customer feedback before implementation

As described in the text above, RBM is flexible and is able to provide a detailed and customer-specific maintenance concept. Feedback from the customer forms an important part of the development. When developing the maintenance concept there will be regular consultations between the customer and CSi to fine-tune and optimise the maintenance concept. One of the important subjects concerns who will carry out the actual maintenance. Some customers may prefer to do as much as possible themselves, while others prefer to let CSi perform all the maintenance.

Custom made for each installed item

Every analysis made will be based on the actual installed item. Therefore it is possible to take several parameters into account that could influence the maintenance. Using data provided by the customer combined with our experience will result in a better maintenance concept. Hence, each machine can be maintained at a different interval or with a different maintenance strategy. This results in a custom-made plan based on the machines and the production at the customer's site. This level of customisation and flexibility gives the customer an optimal maintenance plan that raises the Overall Equipment Effectiveness (OEE).

Overall Equipment Effectiveness

Used in many companies, an OEE assessment provides an indication of the effectiveness of the machines in use. Basically, the OEE calculation assumes the theoretical maximum capacity on the one hand, and on the other, the actual output. By applying RBM, the OEE should significantly improve over the years, approaching the theoretical maximum capacity.

OEE is measured by three separate components: technical availability, machine performance and product quality.

Complete maintenance strategy

As explained, the criticality of certain equipment is determined by performing an FMECA analysis. Based on the outcome of this, a maintenance strategy will be determined, from which there are three different options:

Usage-Based Maintenance

Usage-Based Maintenance (UBM) is a preventive maintenance strategy that is executed based on the number of operating hours. This strategy entails the periodic replacement of parts. Within RBM, UBM is commonly applied in cases where there is a reliable indication of the number of operating hours that can cause a failure, and in cases where a piece of equipment is less expensive, while its risk factor is unacceptable.

Condition-Based Maintenance

Condition-Based Maintenance (CBM) is a preventive maintenance strategy based on inspections or measurements. The inspection is often followed up by more extensive maintenance (CBM follow-up) after exceeding the value of functioning. The predictability of this maintenance method is high. Within RBM, CBM is commonly applied in cases where the function of equipment can be easily checked or when the equipment is more expensive, while its risk factor is unacceptable.

Run-to-Failure

Run-to-Failure (RTF) or Failure-Based Maintenance is a maintenance strategy that is executed when defects or malfunctions have already occurred. This type of maintenance in effect comprises repairing or replacing. The predictability of maintenance is low. Within RBM, RTF is commonly used when the risk factor of a piece of equipment is acceptable. Another option for applying RTF is in a situation where the risk factor for a piece of equipment is unacceptable, but spare parts are in stock.

Maintenance jobs insight

The assigned maintenance strategy is translated into a maintenance task. The maintenance task describes the actual action that is advised to be executed, including an insight into the mitigating effect of the task with regard to the criticality of the component and the necessity to execute the task.

A known maintenance budget

All material and labour costs are determined during an RBM analysis. This ensures a known (indication) of the required maintenance budget during a specific period of time. Unplanned costs are to a large extent replaced by planned costs, thereby mitigating the likelihood of surprises.

Optional additions


There is a possibility to add some optional functionality at the request of customers. Work instructions and linking drawings ensures an addition to RBM. Basically, the 'how' is also added to the concept.

- Work instructions
Work instructions can optionally be provided if a customer requires this for a specific maintenance task. Primarily if customers want to execute the maintenance (partly) themselves.
- Drawings
The drawings of each system/component, and thus the part that needs maintenance, can be incorporated in the system. By having this output available, it is always known which drawing belongs to which part, with its included maintenance task.

Continuous Improvement

The output of an RBM analysis, which is termed the maintenance concept, is ready for operation once the initial analysis has been performed. It should be noted that a maintenance concept is always 'dynamic', and should be constantly improved based on the experience accumulated by working with it. This is where continuous improvement comes into play. The use of a CMMS application can be effective in managing the maintenance plan and applying continuous improvement. The figure below shows the Reliability and Maintenance model and its process.



Reliability and Maintenance model

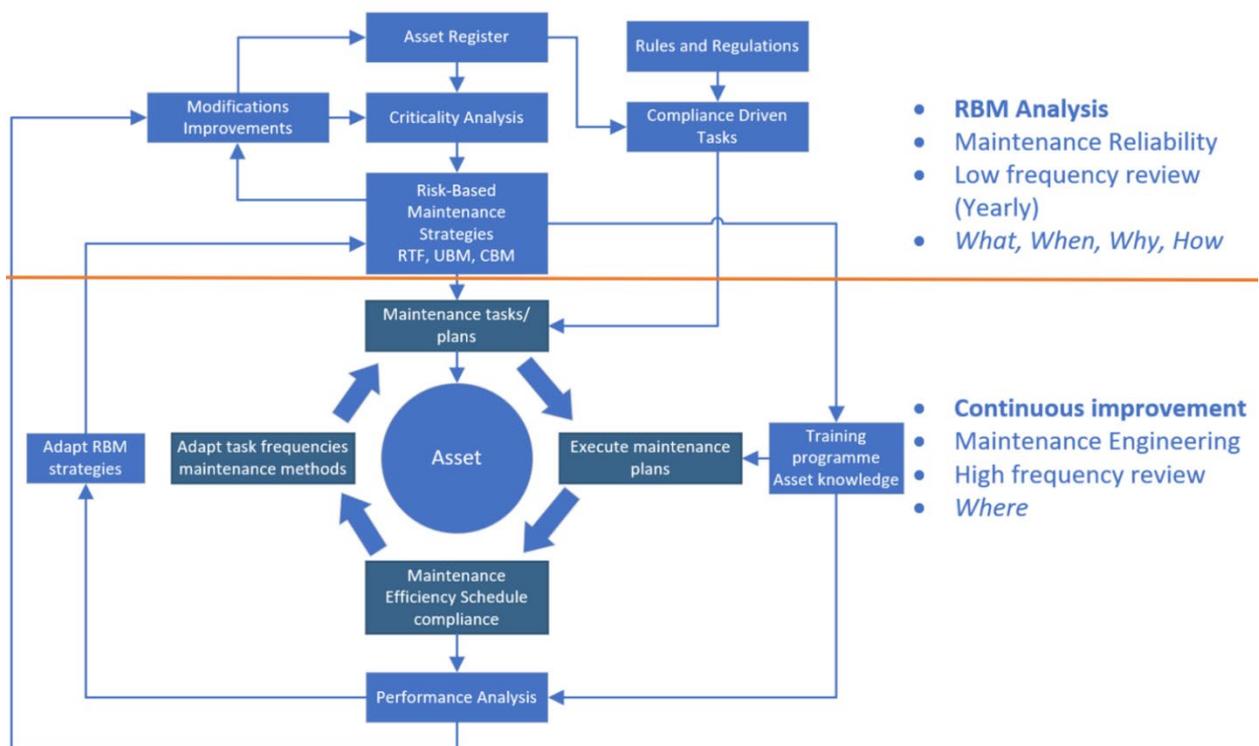

Example case


Note: The purpose of this example case is to give an insight into the approach of RBM in practice with CSi equipment. The data used for this example are fictional.

In this short case study we will analyse a CSi Clamp Hook Pallet Gripper, while applying Risk-Based Maintenance.

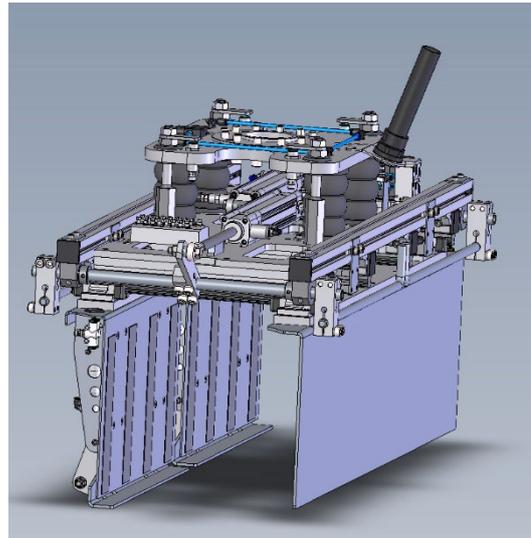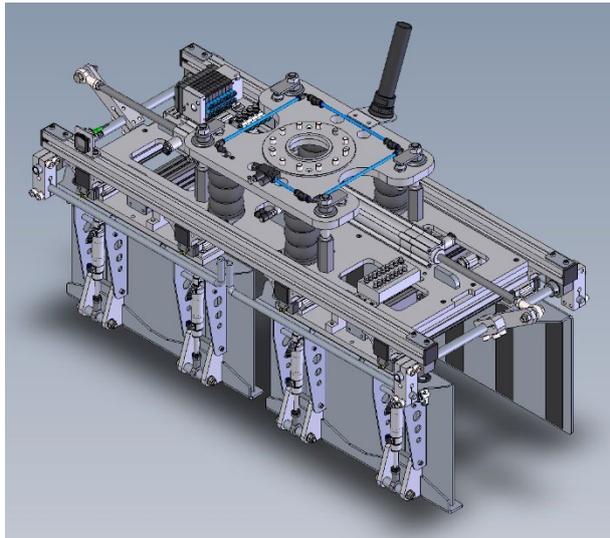

Clamp Hook Pallet Gripper

1. In the first step, the BOM information has to be collected, in order to perform the analysis on the actual machine data. Once this data has been gathered, a distinction must be made between Maintenance Significant Items and Maintenance Insignificant Items since only the parts that are subject to maintenance should be analysed. Screening would provide the following object structure:
2. Before the analysis can be performed, the risk matrix with the company objectives has to be clear and imported into the RBM program. A risk matrix is always company specific, therefore in this example the CSi template is used.

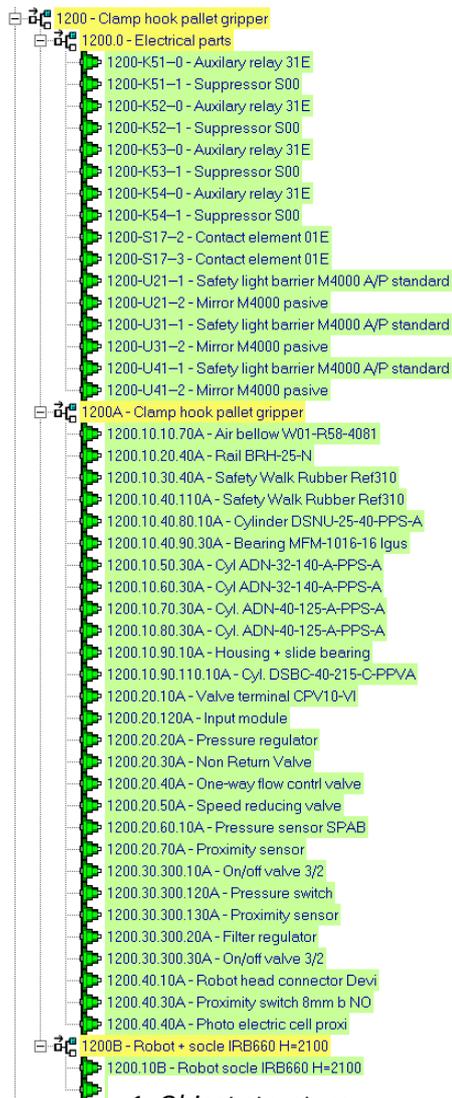

1. Object structure

Criticality Matrix							
Criticality Matrix AVAILABILITY							
Risk = Chance x Effect		Chance					
		10y >	5y - 10y	1y - 5y	6m - 1y	3m - 6m	0 - 3m
EFFECT	Veegfactor	1	2	4	8	16	32
1. No effect	2	2	4	8	16	32	64
2. Production stop between 1/2h and 1h	6	6	12	24	48	96	192
3. Production stop between 1h and 4h	18	18	36	72	144	288	576
4. Production stop between 4h and 12h	54	54	108	216	432	864	1728
5. More than 12 hours production stop	162	162	324	648	1296	2592	5184
Risk-Line	162						

Criticality Matrix HEALTH & SAFETY							
Risk = Chance x Effect		Chance					
		10y >	5y - 10y	1y - 5y	6m - 1y	3m - 6m	0 - 3m
EFFECT	Veegfactor	1	2	4	8	16	32
1. No effect on safety	2	2	4	8	16	32	64
2. Almost accident	6	6	12	24	48	96	192
3. Accident with medic, no permanent injury	18	18	36	72	144	288	576
4. Accident with absence, no permanent injury	54	54	108	216	432	864	1728
5. Severe accident with permanent injury	162	162	324	648	1296	2592	5184
6. Fatal injury	486	486	972	1944	3888	7776	15552
Risk-Line	64						

Criticality Matrix ENVIRONMENT							
Risk = Chance x Effect		Chance					
		10y >	5y - 10y	1y - 5y	6m - 1y	3m - 6m	0 - 3m
EFFECT	Veegfactor	1	2	4	8	16	32
1. No effect on environment	2	2	4	8	16	32	64
2. Internal reporting / Pollution within gate	6	6	12	24	48	96	192
3. External reporting / Complaints	18	18	36	72	144	288	576
4. Fine / Warning / Penalty	54	54	108	216	432	864	1728
5. Withdraw permit / Incident with major impact on environment	162	162	324	648	1296	2592	5184
Risk-Line	64						

Criticality Matrix TECHNICAL COSTS							
Risk = Chance x Effect		Chance					
		10y >	5y - 10y	1y - 5y	6m - 1y	3m - 6m	0 - 3m
EFFECT	Veegfactor	1	2	4	8	16	32
1. 0 to € 500	2	2	4	8	16	32	64
2. € 500 to € 2.000	6	6	12	24	48	96	192
3. € 2.000 to € 5.000	18	18	36	72	144	288	576
4. € 5.000 to € 15.000	54	54	108	216	432	864	1728
5. € 15.000 and more	162	162	324	648	1296	2592	5184
Risk-Line	162						

Criticality Matrix REPUTATION							
Risk = Chance x Effect		Chance					
		10y >	5y - 10y	1y - 5y	6m - 1y	3m - 6m	0 - 3m
EFFECT	Veegfactor	1	2	4	8	16	32
1. No influence on reputation	2	2	4	8	16	32	64
2. Limited influence, reporting within organisation	6	6	12	24	48	96	192
3. Large influence, Reputation damage by customer complaint	18	18	36	72	144	288	576
4. Large influence, Reporting in local news	54	54	108	216	432	864	1728
5. Very large influence, Reporting in (inter)national news	162	162	324	648	1296	2592	5184
Risk-Line	100						


2. Risk matrix

3. Now that the object structure and risk matrix are known, it is possible to carry out the RBM analysis. In this example, one part of the Clamp Hook Pallet Gripper will be analysed.

Air bellow

- Part properties

Properties	
Object type	Equipment
TAG / Parent TAG	1200.10.10.70A 1200A
Description	Air bellow W01-R58-4081
Function	Convert air to movement
Drawing	A148082
Criticality system	Status OPERATING
Typical	E092.423
Remarks	
Mutations	Altered <input type="checkbox"/> Added <input type="checkbox"/> Moved <input type="checkbox"/> 367134
Free fields	
Article number	E092.423
Extended description	DR Size 2 3/4 x3 Al Assy
Drawing norm	Firestone
Quantity used	4
Unit	pc
BOM-level	...5
Delivery time rush (days)	5
Delivery time normal (days)	15

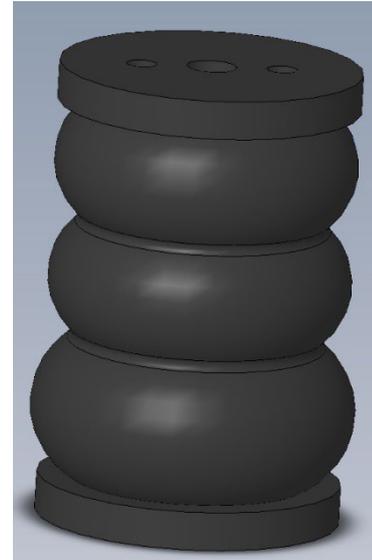

- Failure mode properties and effect on risk matrix

Failure mode	
Failure mode	Does not convert air to movement
TAG	1200.10.10.70A
Description	Air bellow W01-R58-4081
Function	Convert air to movement
PRODUCTION RELIABILITY 10	Production stop of 5d and higher
PRODUCTION RELIABILITY 50	Production stop between 0h and 4h
HEALTH & SAFETY	No effect on safety
ENVIRONMENT	No effect on environment
TECHNICAL COSTS (CONSEQU)	€ 0 to € 1.000
QUALITY	No Effect
Remarks	

	Unmitigated
PRODUCTION RELIABILITY 10	E-5
PRODUCTION RELIABILITY 50	A-5
HEALTH & SAFETY	A-5
ENVIRONMENT	A-5
TECHNICAL COSTS (CONSEQU)	B-5
QUALITY	A-5
Risk Level	→ Overall risk level

- Failure cause properties and MTBF

Failure cause	
Failure cause	Dehydrated bellow
Failure mode	Does not convert air to movement
Condition	Aging
Failure type	Used based
MTBF (unmitigated)	4 Years

- Task details for risk mitigation

Task	
Strategy	CBM Condition Based Maintenance
Task description	Inspect bellow
Remarks	Depending on condition inspection interval could be shortened.
Work instruction	
Adjustment data	
Round Number	
MTBF (unmitigated)	4 Years
MTBF (mitigated)	20 Years
Impact spare part	<input type="checkbox"/>
Task type	Inspection
Consequence	Down
Execution	Plannable
Interval	6 Months
Duration / Downtime (Hrs)	0,1 0,1
Trade	CSi Field support engi
Num. workers	1
Costs material	€ 0,00
Costs external	€ 0,00
Costs total	€ 9,60
Mandatory	<input type="checkbox"/>
Selected	<input checked="" type="checkbox"/>

Follow-up Task	
Task description	Replace bellow
Remarks	
Work instruction	
Adjustment data	
Strategy	CBM Follow-Up Spare part ? <input type="checkbox"/>
Task type	Replace component
Consequence	Down
Execution	Plannable
Trade	CSi Field support engi
Duration / Downtime (Hrs)	1 1
Num. workers	1
Costs material	€ 165,00
Costs external	€ 0,00
Costs total	€ 261,00

- Task effect on risk matrix

	Unmitigated	Mitigated
PRODUCTION RELIABILITY 10	E-5	E-8
PRODUCTION RELIABILITY 50	A-5	A-8
HEALTH & SAFETY	A-5	A-8
ENVIRONMENT	A-5	A-8
TECHNICAL COSTS (CONSEQU)	B-5	B-8
QUALITY	A-5	A-8
Risk Level	=> Overall risk level	=> Overall risk level

In the case of the air bellow, **Condition-Based Maintenance** is applied in order to mitigate the risk of failure and unplanned downtime. Inspections are performed in order to prevent the part from failing (i.e., being aware that a failure is going to occur in the event that the part is not replaced). Thus, in this case the part is replaced before the failure would take place.

Conclusion

To conclude, applying a Risk-Based Maintenance strategy would ensure added value to your asset, by only carrying out the appropriate maintenance, determined based on your business objectives. The availability of a customer specific risk matrix, in combination with applying a Failure Mode & Effect Analysis, will generate several outputs such as:

- Object structure
- Criticality
- Failure causes & failure modes
- Unmitigated & mitigated risks
- Preventive maintenance tasks
- Rounds
- Spare parts strategy

The complete set of these outcomes is termed the 'maintenance concept', which leads to:

- Fewer unplanned breakdowns in the systems
- Reducing interruptions within the production process
- Leading to greater safety
- Increased machine reliability
- Higher technical availability
- A known maintenance budget

How can we help you?

Are you interested in optimising your maintenance strategy and adding more value to your assets? Applying a Risk-Based Maintenance strategy would lead to several benefits.

CSi has almost 60 years of experience in realising all forms of projects around palletising and conveying equipment. Based on that history, CSi is highly capable of executing all types of palletising projects. Having built experience with both robotic palletising and layer palletising since the beginning of the 1980s, CSi has truly become a specialist in this field. We are always happy to be able to share our wealth of knowledge and experience with customers that are thinking about automatic palletising.

If you would like to receive more information, do not hesitate to contact us.

CSi palletising

Lissenveld 41

4941 VL Raamsdonksveer

The Netherlands

Tel. +31 162 575 000

info@CSiportal.com or frontoffice@CSiportal.com

